

LSC0812DE

ELECTRIC SCISSOR LIFT

Comply with CE standard



Security and Intelligence

- Intelligent control system, real-time monitoring of equipment status;
- Multiple security protection to ensure personnel safety;
- Intelligent charging system to extend battery service life.

Easy to Control

- Drivable at full height to improve working efficiency;
- The proportion drops and the descent moves smoothly;
- Forklift pocket, easy to load, unload and transport.

Maintenance Friendly

- Self-lubricating sleeve;
- Swing-out tray on both sides, easy maintenance;
- Fault code indication to facilitate troubleshooting.

Standard Features


- Standard longitudinal forklift sprocket hole
- Standard lateral forklift sprocket hole
- Adjustable extension platform
- Active pothole protection
- All motion alarm
- Emergency lowering system
- Drop anti-clip function
- Side anti-collision function
- Charging protection system
- Emergency stop button
- Proportional control
- Acousto-optic warning lights
- Drivable at full height
- Folding guardrails
- Over tilt protective system



LSC0812DE >>>



Specifications

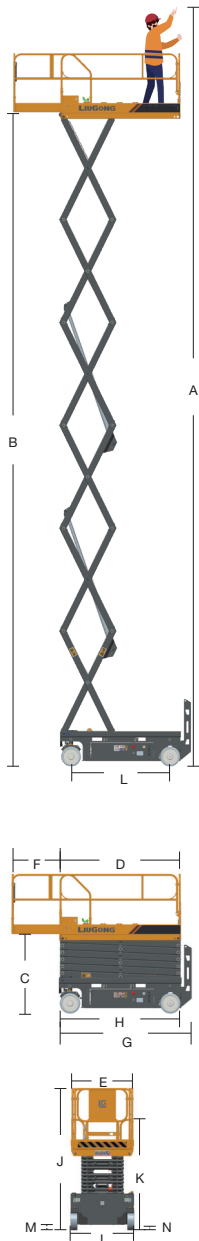

Item	Unit	LSC0812DE
Size		
A - Max.Work Height	m	10
B - Max.Platform Height	m	8
C - Min.Platform Height	m	1.21
D - Platform Length	m	2.28
E - Platform Width	m	1.15
F - Max.Platform Extension Length	m	0.9
G - Overall Length	m	2.49
H - Overall Length(Without Ladder)	m	2.29
I - Overall Width	m	1.19
J - Overall Height (Rails Up)	m	2.37
K - Overall Height (Rails Down)	m	1.81
L - Wheelbase	m	1.88
M - Ground Clearance (Stowed)	mm	100
N - Ground Clearance (Raised)	mm	20
Performance		
Rated Load on Working Platform	kg	450
Safe Working Load on Extended Platform	kg	120
Max. Occupants	/	2
Travel Speed (Stowed)	km/h	4
Travel Speed (Raised)	km/h	0.7
Turning Radius (Inside)	m	0
Turning Radius (Outside)	m	2.3
Up/Down Time	s	38/42
Max.Gradeability	/	25%
Max. Working Slope (Lateral/Vertical)	°	X1.5°/Y3°
Tire size	mm	381x127
Power		
Drive Motor	kW	1.5
Battery	/	225Ah
Charger	/	24V30A
Weight		
Total Weight	kg	2640



Swing-out Tray



Emergency Lowering System



Acousto-optic Warning Lights



Steering System



Extended Platform



Safety Overhaul Bracket



Folding Guardrails



Max.Gradeability 30%